

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



PATENT APPLICATION
ATTORNEY DOCKET NO. 70207

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Moshe BENYAMI et al.
Appln. No.: 09/785,072
Filed: February 16, 2001
Title: BALLISTIC ARMOR PANEL
Group Art Unit: 3641
Examiner: not yet known

CERTIFICATE OF MAILING

I hereby certify that this paper is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on this date.

06/11/01
Date

Kenneth H. Samples
Registration No. 25,747
Attorney for Applicant(s)

TRANSMITTAL OF PRIORITY DOCUMENT

Commissioner of Patents
and Trademarks
ATTENTION: Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

A claim for priority based on Israeli Patent Application No. 134642 has been filed in the above-identified U.S. application. Enclosed, in compliance with 37 C.F.R. §1.55, is a Certified Copy of Israeli Priority Document No. 134642, filed on February 20, 2000.

Respectfully submitted,

FITCH, EVEN, TABIN & FLANNERY

By: *Kenneth H. Samples*
Kenneth H. Samples
Registration No. 25,747

Date: June 11, 2001

120 South LaSalle St., Suite 1600
Chicago, Illinois 60603-3406
Telephone: (312) 577-7000
Telefax: (312) 577-7007

לשימוש הלשכה
For Office Use

מספר: Number	134642
תאריך: Date	21-02-2000
הוקדם/נדחה: Ante/Post-dated	

בקשה לפטנט
Application For Patent

אני, (שם המבקש, מענו ולגבי גוף מאוגדת מקום התאגדותו)
I, (Name and address of applicant, and in case of body corporate-place of incorporation)

מדינת ישראל, משרד הבטחון, רשות לפתוח אמצעי לחימה, רפא"ל מת"ד 2250, חיפה 31021, ישראל
The State Of Israel, Ministry Of Defence, Armament Development Authority, Rafael of P.O.Box
2250, Haifa 31021, ISRAEL

The Inventor: Moshe BENYAMI

הממציא: משה בנימי

שם המצאה מכח בעל אמצאה מכח
Right of Law
הדין
of an invention the title of which is Owner, by virtue of

לוח מיגון בליסטי

(בעברית)
(Hebrew)

Ballistic armor panel

(באנגלית)
(English)

Hereby apply for a patent to be granted to me in respect thereof.

מבקש בזאת כי ינתן לי עליה פטנט

* בקשת חלוקה Application of Division		* בקשת פטנט מוסף Appl. for Patent of Addition			* דרישת דין קדימה Priority Claim		
מבקשת פטנט from application		* לבקשה/לפטנט to Patent/Appl.		מספר/סימן Number/Mark	תאריך Date	מדינת האיגוד Convention Country	
No.	מס'	No.	מס'				
Dated	מיום	Dated	מיום				
P.O.A.: General		* יפוי כח: כללי					
filed in case		P 84319					
		המען למסירת מסמכים בישראל Address for Service in Israel					
REINHOLD COHN AND PARTNERS Patent Attorneys P.O.B. 4060, Tel-Aviv		C. 121152					
חתימת המבקש Signature of Applicant		היום This					
For the Applicants, REINHOLD COHN AND PARTNERS By : —		שנת 2000 Year February 20 of					
		לשימוש הלשכה For Office Use					

טופס זה כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובתאריך ההגשה, הנו אישור להגשת הבקשה שפרטיה רשומים לעיל.
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application the particulars of which are set out above.

* מחק את המיותר
Delete whatever is inapplicable

לוח מיגון בליסטי

Ballistic armor panel

**The State Of Israel, Ministry Of Defence,
Armament Development Authority, Rafael**

**מדינת ישראל, משרד הבטחון,
רשות לפתוח אמצעי לחימה, רפא"ל**

The Inventor:
Moshe BENYAMI

הממציא:
משה בנימי

C. 121152

BALLISTIC ARMOR PANEL

FIELD OF THE INVENTION

This invention generally relates to ballistic armor panels of the type useful in protection of objects and equipment against small arms bullets and kinetic energy projectiles, i.e. fire arm rounds and projectiles artillery fragments and shrapnel. The invention is in particular concerned with a carrying board supporting a plurality of bodies.

BACKGROUND OF THE INVENTION

Ballistic armor panels are utilized for a variety of protective missions, in particular for reducing hit-risk of objects such as vehicles, equipment, structures, etc. from small arms projectiles, kinetic energy penetrators and from fragments of explosive charges, bombs, etc. For that purpose, armor panels are applied to the objects, which armor panels should be capable of stopping a bullet or a projectile or a fragment of an explosive charge within an extremely short distance, i.e. the effective thickness of the ballistic armor panel.

A variety of armor panels are known, each typically comprising several layers of material holding a plurality of hard bodies typically made of ceramic material for effectively distributing the impact of a projectile, bullet, etc. Typically the ceramic bodies are bonded to the carrying layers by suitable adhesive materials.

One considerable disadvantage of heretofore known armor panels resides in that the carrying layers are not fitted for attaching directly to the object to be protected, whereby additional fixing means are required which are both heavy and somewhat cumbersome in assembly. A second disadvantage is the labor required
5 for assembling protective panels of the aforementioned type. Evermore, the ceramic bodies are exposed and are thus vulnerable to mechanical damage and after a series of several hits they may brake and the ballistic panel may loose its effectiveness. In particular, the edges of the ceramic bodies are susceptible to damage and break easily, reducing the effectiveness of the armor panel.

10 It is thus an object of the present invention to provide a new and improved armor panel, which substantially reduces or overcomes the above drawbacks.

SUMMARY OF THE INVENTION

The present invention provides an improved ballistic armor panel for attaching to an object, the panel comprising a carrying board made of a hard
15 material and formed with a plurality of adjoining through-going apertures, each aperture receiving a body made of a hard materiel and having a longitudinal axis coaxial with an axis of the respective aperture. Typically, the bodies are made of a ceramic material, such as, for example, alumna, silicone carbide, boron carbide, etc. The bodies may be made of a low density material although this is not a
20 requirement.

Preferably, the bodies correspond in shape with the apertures of the board. Said bodies may be cylindrical or polygonal. By one specific design, where the bodies are polygonal, the openings of the carrying board form together a honey-comb like shape.

25 Preferably, in order to retain the bodies within the apertures and to reduce their susceptibility to breakage, the apertures are formed with an annular rim extending into the aperture and being essentially flush with a surface of the carrying board remote from the object.

According to a different embodiment, the apertures taper from a face of the
30 carrying board facing the object.

The bodies may be also adhered within the apertures of the carrying board. They may also be adhered to a back layer of resilient material applied between the object and the carrying board. Such a layer may be made, for example, from laminates of ballistic fibers.

5 The carrying board may be formed with suitable bores for directly attaching to a surface of the object. Any of the apertures of the board may serve as a bore.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to understand the invention and to see how it may be carried out in practice, a preferred embodiment will now be described, by way of non-limiting
10 example only, with reference to the accompanying drawings, in which:

Fig. 1 is perspective view, partially cut-out, of a ballistic armor panel according to a first embodiment of the present invention;

Fig. 2 is a sectional view of a portion of a ballistic panel according to a modification of the invention, wherein the apertures are formed with an annular
15 rim;

Fig. 3 is a sectional view of a portion of a ballistic panel according to a still a modification of the invention, wherein the apertures taper;

Fig. 4 is a sectional view illustrating a modification of the embodiment seen in Fig. 3A wherein the apertures taper and are formed with an annular rim;

20 Fig. 5 is a sectional view illustrating a further application of the present invention, with a resilient back-layer provided at a back face of the carrier board;

Fig. 6 is a perspective view, partially cut-out, of still a different embodiment of the invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

25 Attention is first directed to Fig. 1 of the drawings in which a ballistic panel 10 comprising a carrying board 12 made of a hard material such as, for example, steel, titanium, aluminum, composite materials, etc. The carrying board is formed with a plurality of apertures 16, which in the present example are

cylindrical. The apertures 16 may be machined or may be pre-molded, e.g. when the carrying board is made of cast material.

The thickness of the wall between adjoining apertures is between about 0.5 to 1 mm. However, this thickness may differ depending on different parameters such as type of materials and its mechanical properties, thickness of panel, etc.

The carrying board 12 is formed with several bores 20, for connecting the panel to an object by bolts 22, etc. However, any one of the apertures 16 may also serve for attaching the board to the object (not shown. The object may be a structure, a vehicle, etc.) with possible use of different adapters.

A plurality of cylindrical bodies 24, made of an essentially hard material e.g. hard ceramics such as alumina, boron carbide, silicone carbide, glass, etc. are received within the apertures 16. The bodies 24 are snugly received within the apertures 16 and their axial length does not exceed that of the apertures, whereby the bodies 24 do not project from a front face 30 of the carrying board 12.

In order to prevent the bodies 24 from spontaneously detaching from the carrying board 12, a bonding material may be applied between the walls of the bodies 24 and the apertures 16.

According to one particular embodiment (not shown), the axial length of the bodies 24 is shorter than that of the apertures and the front faces 32 of the bodies are retracted so that they extend below the front face 30 of the carrying board, rendering the edges of the bodies less susceptible to external impact and to deterioration upon hitting by an external body thus reducing the damage of the of the bodies 24.

Further attention is now directed to Fig. 2, wherein an armor panel 40 is attached to an object 42 by bolts 44. The apertures 46 of the carrying member 48 are formed with an annular rim 50 at a front end thereof, essentially flush with the front face 54. This arrangement is useful both for retaining the bodies 56 within the apertures 46 as well as for preventing deterioration of the edges of the front face 58 of the body 56.

In Fig. 3 the carrying board 60 is formed with a plurality of apertures 62 tapering from a wide opening at a rear face facing the object (not shown) and a narrower opening at the front face 64. This arrangement ensures that the bodies 66 do not disengage from the apertures of the carrying board.

5 In the embodiment of Fig. 4 the carrying board 68 comprises tapering apertures 70 as in the embodiment of Fig. 3A, with the addition that each aperture is formed with an annular rim 72 as in the embodiment of Fig. 2, whereby the bodies 74 supported in such apertures are shorter than those of Fig. 3 and are thus more protected.

10 Fig. 5 represents still a further embodiment in which a ballistic panel 80, which is similar to the embodiment of Fig. 1, (although any other of the previous embodiments may be selected). In the present embodiment there is provided a thin layer of flexible material 82 (such as a resilient material, Kevlar™, Dyneema™, fiberglass, laminate of ballistic fibers, etc.) adhered to the back face of the carrying
15 board 84 by a layer of adhesive substance 86, bonding the bodies 88 on the one hand, and providing some impact dampening on the other hand.

In Fig. 6 there is shown a ballistic panel 98 formed with a plurality of polygonal apertures 100 (hexagonal in the specific embodiment, though any other polygonal shape will be suitable, e.g. triangular, square, hectagonal etc.) each fitted
20 with a body 102 having a corresponding shape and retained as explained hereinbefore. Bolts 105 extend via edge apertures 103 and are fitted with washers 105.

As will be appreciated by a versed person, only some preferred embodiments have been shown and described in the specification and drawings.
25 However, it is to be understood that it is not intended thereby to limit the disclosure of the invention, but rather it is intended to cover all modifications and arrangements falling within the scope and the spirit of the present invention, *mutatis mutandis*.

CLAIMS:

1. A ballistic armor panel for attaching to an object, the panel comprising a carrying board made of a hard material and formed with a plurality of adjoining through-going apertures, each aperture receiving a body made of a hard material and having a longitudinal axis coaxial with an axis of the respective aperture.
5
2. A ballistic armor panel according to Claim 1, wherein the bodies correspond in shape with the apertures of the carrying polygonal board.
3. A ballistic armor panel according to Claim 2, wherein the bodies are cylindrical.
- 10 4. A ballistic armor panel according to Claim 2, wherein the bodies are polygonal.
5. A ballistic armor panel according to Claim 3, wherein the carrying board has a honey-comb like shape.
6. A ballistic armor panel according to Claim 1, wherein the apertures are
15 formed with an annular rim being flush with a face of the carrying board remote from the object.
7. A ballistic armor panel according to Claim 2, wherein the walls of the apertures taper from a face thereof facing the object.
8. A ballistic armor panel according to Claim 1, wherein the bodies are fixed to
20 the carrying board by an adhesive substance.
9. A ballistic armor panel according to Claim 1, wherein the axial length of said bodies does not exceed the thickness of the carrying board.
10. A ballistic armor panel according to Claim 1, wherein the carrying board comprises bores for attaching to the object.
- 25 11. A ballistic armor panel according to Claim 1, wherein the carrying board is attached to the object by fasteners extending through the apertures.
12. A ballistic armor panel according to Claim 1, wherein a layer of resilient material is provided intermediate the object and the carrying board.

13. A ballistic armor panel according to Claim 1, wherein the wall thickness between adjoining apertures is between about 0.5 to 1 mm.

For the Applicants,
REINHOLD COHN AND PARTNERS
By:

A handwritten signature in black ink, appearing to be 'RC', written over the 'By:' line.

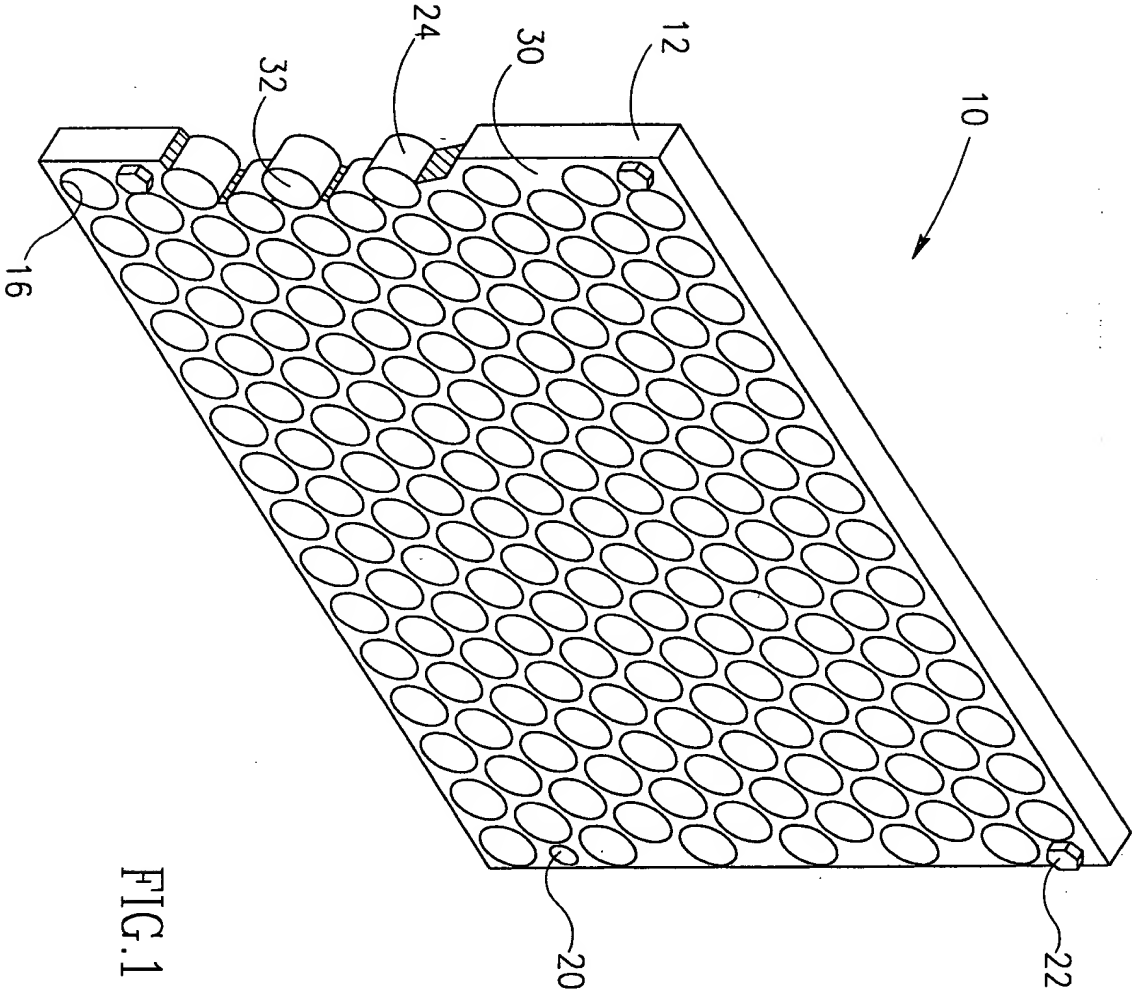


FIG. 1

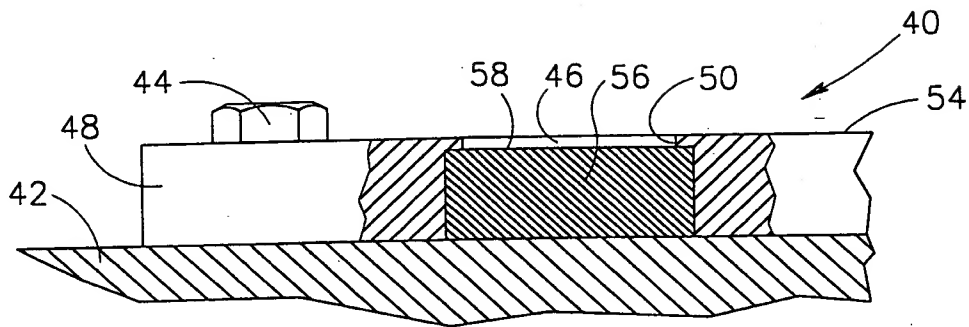


FIG. 2

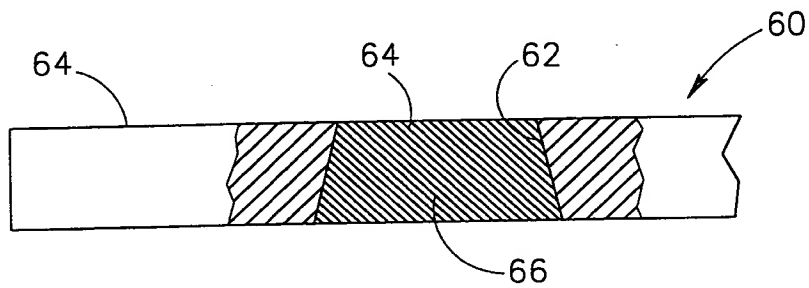


FIG. 3

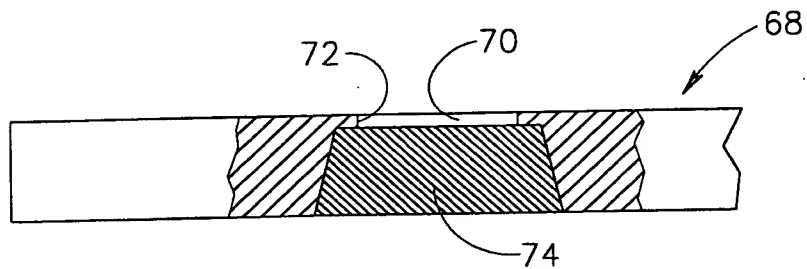


FIG. 4

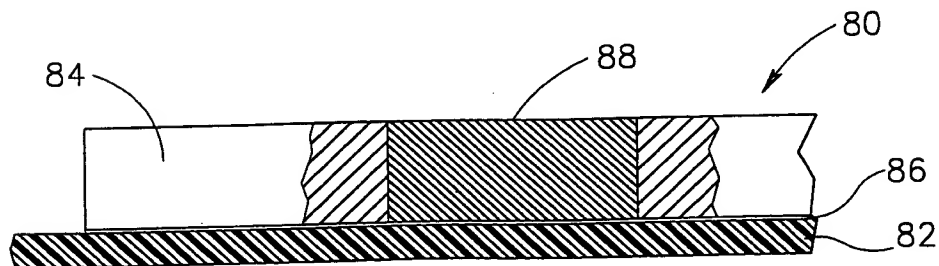


FIG. 5

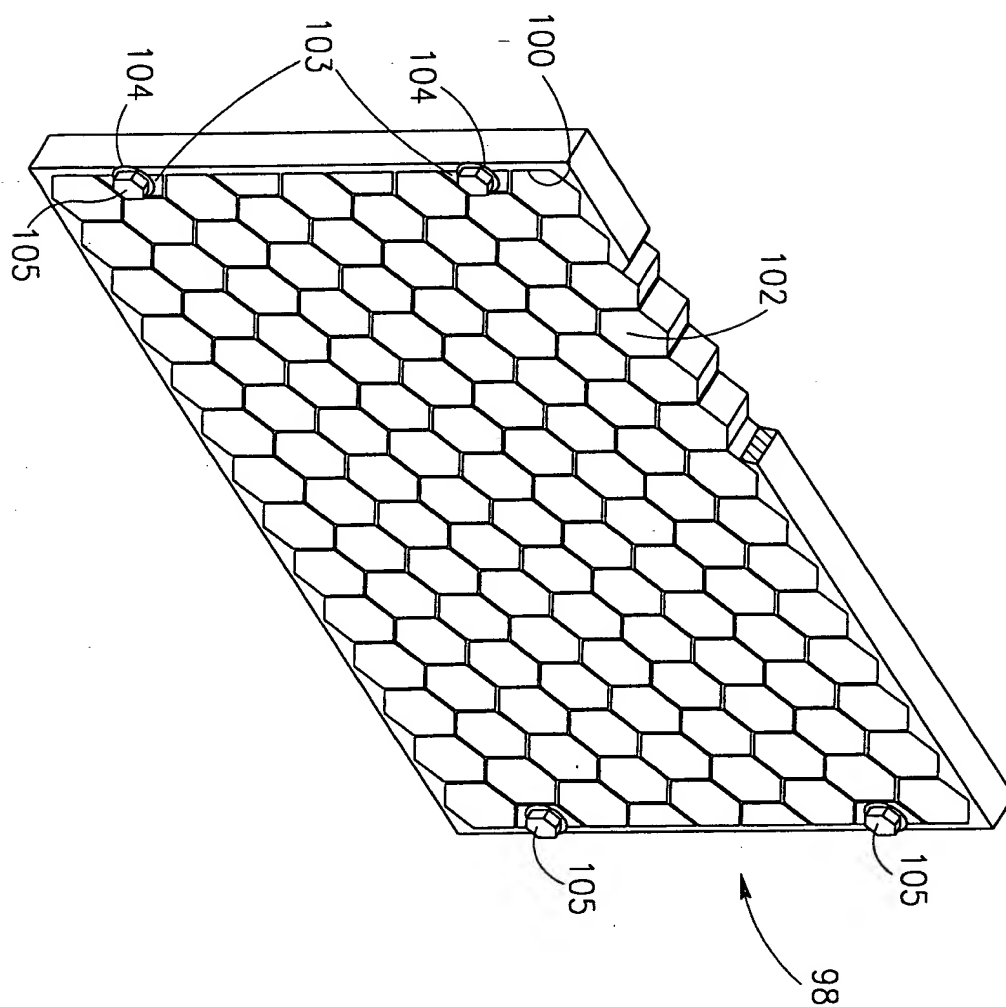


FIG. 6



Creation date: 01-16-2004
Indexing Officer: ACHUNVICHIT - ANTHONY CHUNVICHIT
Team: OIPEBackFileIndexing
Dossier: 09785072

Legal Date: 12-10-2001

No.	Doccode	Number of pages
1	IDS	2
2	NPL	2

Total number of pages: 4

Remarks:

Order of re-scan issued on